

05/23/00
1c580 U.S. PTO

Please type a plus sign (+) inside this box → ☒

Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL <small>(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))</small>	Attorney Docket No.	PP07US
	First Inventor or Application Identifier	Simon Robert Walmsley
	Title	CONTROLLER FOR PRINTER MODULE
	Express Mail Label No.	

APPLICATION ELEMENTS <small>See MPEP chapter 600 concerning utility patent application contents.</small>	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231	
1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) <small>(Submit an original and a duplicate for fee processing)</small>	5. <input type="checkbox"/> Microfiche Computer Program (Appendix)	
2. <input checked="" type="checkbox"/> Specification [Total Pages 31] <small>(preferred arrangement set forth below)</small> <ul style="list-style-type: none">- Descriptive title of the Invention- Cross References to Related Applications- Statement Regarding Fed sponsored R & D- Reference to Microfiche Appendix- Background of the Invention- Brief Summary of the Invention- Brief Description of the Drawings (if filed)- Detailed Description- Claim(s)- Abstract of the Disclosure	6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) <ul style="list-style-type: none">a. <input type="checkbox"/> Computer Readable Copyb. <input type="checkbox"/> Paper Copy (identical to computer copy)c. <input type="checkbox"/> Statement verifying identity of above copies	
3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 13]	ACCOMPANYING APPLICATION PARTS <ul style="list-style-type: none">7. <input checked="" type="checkbox"/> Assignment Papers (cover sheet & document(s))8. <input type="checkbox"/> 37 C.F.R. § 3.73(b) Statement of Power of Attorney (when there is an assignee)9. <input type="checkbox"/> English Translation Document (if applicable)10. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 [Copies of IDS Citations]11. <input type="checkbox"/> Preliminary Amendment12. <input type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized)13. <input checked="" type="checkbox"/> * Small Entity Statement(s) filed in prior application, Status still proper and desired (PTO/SB/09-12)14. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)15. <input type="checkbox"/> Other: _____	
4. Oath or Declaration [Total Pages 3] <ul style="list-style-type: none">a. <input checked="" type="checkbox"/> Newly executed (original or copy)b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) (for continuation/divisional with Box 16 completed)<ul style="list-style-type: none">i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).		
* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).		
16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment: <input type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input type="checkbox"/> Continuation-in-part (CIP) of prior application No: _____ Prior application information: Examiner _____ Group / Art Unit: _____ For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.		

17. CORRESPONDENCE ADDRESS					
<input checked="" type="checkbox"/> Customer Number or Bar Code Label		24011		or <input type="checkbox"/> Correspondence address below	
<small>(Insert Customer No. or Attach bar code label here)</small>					
Name	Kia Silverbrook				
	Silverbrook Research Pty Ltd				
Address	393 Darling Street				
City	Balmain	State	NSW	Zip Code	2041
Country	AUSTRALIA	Telephone	61-2-9818-6633	Fax	61-2-9818-6711

Name (Print/Type)	Kia Silverbrook	Registration No. (Attorney/Agent)	
Signature		Date	May 16, 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

**STATEMENT CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(c))--SMALL BUSINESS CONCERN**

Docket Number (Optional)
PP07US

Applicant, Patentee, or Identifier: Silverbrook Research Pty Ltd

Application or Patent No.: _____

Filed or Issued: May, 2000

Title: CONTROLLER FOR PRINTER MODULE

I hereby state that I am

- ☒ the owner of the small business concern identified below:
☐ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF SMALL BUSINESS CONCERN Silverbrook Research Pty. Ltd.

ADDRESS OF SMALL BUSINESS CONCERN 393 Darling Street, Balmain, NSW 2041, Australia

I hereby state that the above identified small business concern qualifies as a small business concern as defined in 13 CFR Part 121 for purposes of paying reduced fees to the United States Patent and Trademark Office. Questions related to size standards for a small business concern may be directed to: Small Business Administration, Size Standards Staff, 409 Third Street, SW, Washington, DC 20416.

I hereby state that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in:

- ☒ the specification filed herewith with title as listed above.
☐ the application identified above.
☐ the patent identified above.

If the rights held by the above identified small business concern are not exclusive, each individual, concern, or organization having rights in the invention must file separate statements as to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization having any rights in the invention is listed below:

- ☒ no such person, concern, or organization exists.
☐ each such person, concern, or organization is listed below.

Separate statements are required from each named person/concern or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

NAME OF PERSON SIGNING Kia Silverbrook

TITLE OF PERSON IF OTHER THAN OWNER _____

ADDRESS OF PERSON SIGNING 393 Darling Street, Balmain, NSW 2041, Australia

SIGNATURE  DATE May 16, 2000

CONTROLLER FOR A PRINTER MODULE

FIELD OF THE INVENTION

5 The invention relates to a compact printer system able to print full-color, business card size documents from a device about the size of a pen. The system includes various hot-connectable modules that provide a range of functions. In particular the invention relates to a controller for a printer module of the compact printer system.

10 Reference may be had to co-pending applications claiming priority from Australian Provisional Patent Application number PQ0560 dated 25 May 1999. The co-pending applications describe related modules and methods for implementing the compact printer system. The co-pending applications are as follows:

USSN	Docket No.	Title
TBA	PP01	Compact Color Printer Module
TBA	PP02	Modular Compact Printer System
TBA	PP03	Nozzle Capping Mechanism
TBA	PP04	Ink Cartridge for Compact Printer System
TBA	PP08	Camera Module for Compact Printer System
TBA	PP09	Image Processor for Camera Module
TBA	PP10	Memory Module for Compact Printer System
TBA	PP11	Effects Module for Compact Printer System
TBA	PP12	Effects Processor for Effects Module
TBA	PP13	Timer Module for Compact Printer System
TBA	PP15	Color Conversion Method for Compact Printer System
TBA	PP16	Method and Apparatus of Dithering
TBA	PP17	Method and Apparatus of Image Conversion

BACKGROUND OF THE INVENTION

15 Microelectronic manufacturing techniques have led to the miniaturization of numerous devices. Mobile phones, personal digital assistant devices, and digital cameras are very common examples of the miniaturization trend.

20 One device that has not seen the advantage of microelectronic manufacturing techniques is the printer. Commercially available printers are large compared to many of the devices they could support. For instance, it is impractical to carry a color printer for the purpose of instantly printing photographs taken with known compact digital cameras.

A compact printhead has been described in co-pending United States Patent Applications filed simultaneously to the present application and hereby incorporated by cross reference:

USSN	Docket No.	Title
TBA	MJ62	Fluidic seal for an ink jet nozzle assembly
TBA	IJ52	Ink jet printhead having a moving nozzle with an externally arranged actuator
TBA	IJM52	Method of manufacture of an ink jet printhead having a moving nozzle with an externally arranged actuator
TBA	MJ63	Ink jet printhead nozzle array
TBA	MJ58	Nozzle guard for an ink jet printhead

5 In order to construct a compact print module for a compact printer system it is necessary to address the problem of control of the printer and communication of the image to the printhead. Methods of very large scale integration and microelectronic manufacturing are known but have not been applied to the needs of a compact printer system. No suitable print controller exists for a compact color printer module.

10

SUMMARY OF THE INVENTION

In one form, the invention resides in a method of controlling a printer module having a printhead that prints an image on printable media, said method including the steps of:

15 storing an image in image storage memory;
sensing the presence of printable media in the printer module;
activating a motor to advance said printable media past said printhead in said printer module;
retrieving said image from said image storage memory;
20 transforming said image to a form suitable for said printhead; and
transferring said transformed image to said printhead in a synchronous manner for printing by said printhead on said printable media.

In another form, the invention resides in a controller for a printer module having a printhead that prints an image on printable media, said controller
25 comprising:
a central processing unit;

program memory associated with said central processing unit, said program memory storing program steps for execution by said central processing unit to operate said printer module to print said image;
one or more interface units communicating with components of said printer module;
5 image storage memory storing said image; and
an image access unit in communication with said image storage memory, said central processing unit and a printhead interface, said image access unit accessing said image in said image storage memory and transferring said image to said printhead interface on command from said central processing unit;
10 wherein said printhead interface transforms said image for printing by a printhead.

Further features of the invention will be evident from the following description.

BRIEF DESCRIPTION OF THE DRAWINGS

15 In order to assist with describing preferred embodiments of the invention, reference will be made to the following figures in which:

FIG 1 is a printer module;

FIG 2 is a camera module;

FIG 3 is a memory module;

20 FIG 4 is a communication module;

FIG 5 is a flash module;

FIG 6 is a timer module;

FIG 7 is a laser module;

FIG 8 is an effects module;

25 FIG 9 is a characters module;

FIG 10 is an adaptor module;

FIG 11 is a pen module;

FIG 12 is a dispenser module;

FIG 13 is a first compact printer configuration;

30 FIG 14 is a second compact printer configuration;

FIG 15 is a third compact printer configuration;

FIG 16 is a fourth compact printer configuration;

FIG 17 is a block diagram of a controller for the printer module of FIG 1;

FIG 18 is a schematic block diagram of a printhead interface;

FIG 19 is a schematic block diagram of a print generator unit; and
FIG 20 is a schematic block diagram of an up-interpolate, halftone and reformat for
printer unit.

5 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to FIGs 1 to 12, there are shown various modules that together form
a compact printer system. Individual modules can be attached and detached from the
compact printer configuration to allow a user-definable solution to business-card sized
printing. Images can also be transferred from one compact printer to another without
10 the use of a secondary computer system. Modules have a minimal user-interface to
allow straightforward interaction.

A compact printer system configuration consists of a number of compact
printer modules connected together. Each compact printer module has a function that
contributes to the overall functionality of the particular compact printer configuration.
15 Each compact printer module is typically shaped like part of a pen, physically
connecting with other compact printer modules to form the complete pen-shaped
device. The length of the compact printer device depends on the number and type of
compact printer modules connected. The functionality of a compact printer
configuration depends on the compact printer modules in the given configuration.

20 The compact printer modules connect both physically and logically. The
physical connection allows modules to be connected in any order, and the logical
connection is taken care of by the compact printer Serial Bus - a bus that provides
power, allows the modules to self configure and provides for the transfer of data.

In terms of physical connection, most compact printer modules consist of a
25 central body, a male connector at one end, and a female connector at the other. Since
most modules have both a male and female connector, the modules can typically be
connected in any order. Certain modules only have a male or a female connector, but
this is determined by the function of the module. Adaptor modules allow these single-
connector modules to be connected at either end of a given compact printer
30 configuration.

A four wire physical connection between all the compact printer modules
provides the logical connection between them in the form of the compact printer
Serial Bus. The compact printer Serial Bus provides power to each module, and
provides the means by which data is transferred between modules. Importantly, the

compact printer Serial Bus and accompanying protocol provides the means by which the compact printer system auto-configures, reducing the user-interface burden on the end-user.

Compact printer modules can be grouped into three types:

- 5 • image processing modules including a Printer Module (FIG 1), a Camera Module (FIG 2), and a Memory Module (FIG 3). Image processing modules are primarily what sets the compact printer system apart from other pen-like devices. Image processing modules capture, print, store or manipulate photographic images;
- 10 • housekeeping modules including an Adapter Module (FIG 10), an Effects Module (FIG 8), a Communications Module (FIG 4), and a Timer Module (FIG 6). Housekeeping modules provide services to other modules or extended functionality to other modules; and
- 15 • isolated modules including a Pen Module (FIG 11) and a Laser Module (FIG 7). Isolated modules are those that attach to the compact printer system but are completely independent of any other module. They do not necessarily require power, and may even provide their own power. Isolated Modules are defined because the functionality they provide is typically incorporated into other pen-like devices.

Although housekeeping modules and isolated modules are useful components in a compact printer system, they are extras in a system dedicated to image processing and photographic manipulation. Life size (1:1) illustrations of the compact printer modules are shown in FIGs 1 to 12, and example configurations produced by connecting various modules together are shown in FIGs 13 to 16.

FIG 1 shows a printer module that incorporates a compact printhead described in co-pending United States Patent Applications listed in the Background section of this application, incorporated herewith by reference, and referred to herewith as a Memjet printhead. The Memjet printhead is a drop-on-demand 1600 dpi inkjet printer that produces bi-level dots in up to 4 colors to produce a printed page of a particular width. Since the printhead prints dots at 1600 dpi, each dot is approximately 22.5 μ m in diameter, and spaced 15.875 μ m apart. Because the printing is bi-level, the input image should be dithered or error-diffused for best results. Typically a Memjet printhead for a particular application is page-width. This enables the printhead to be stationary and allows the paper to move past the printhead. A Memjet printhead is composed of a number of identical 1/2 inch Memjet segments.

The printer module 10 comprises a body 11 housing the Memjet printhead. Power is supplied by a three volt battery housed in battery compartment 12. The printhead is activated to commence printing when a business card (or similar sized printable media) is inserted into slot 13. Male connector 14 and female connector 15 facilitate connection of other modules to the printer module 10.

FIG 2 shows a camera module 20. The camera module provides a point-and-shoot camera component to the compact printer system as a means of capturing images. The camera module comprises a body 21 having a female connector 22. A lens 23 directs an image to an image sensor and specialized image processing chip within the camera 24. A conventional view finder 25 is provided as well as a lens cap 26. An image is captured when the Take button 27 is pushed. Captured images are transferred to the Printer Module 10 for subsequent printing, manipulation, or storage. The Camera Module also contains a self-timer mode similar to that found on regular cameras.

FIG 3 shows a Memory Module 30 comprising a body 31, LCD 32, IN button 33, OUT button 34 and SELECT button 35. The Memory Module 30 is a standard module used for storing photographic images captured by the Camera 20. The memory module stores 48 images, each of which can be accessed either at full resolution or at thumbnail resolution. Full resolution provides read and write access to individual images, and thumbnail resolution provides read access to 16 images at once in thumbnail form.

The Memory Module 30 attaches to other modules via a female connector 36 or male connector 37. The male and female connectors allow the module to be connected at either end of a configuration. Power is provided from the Printer Module 10 via the Serial Bus.

A Communications Module 40 is shown in FIG 4. The communications module 40 consists of a connector 41 and a cable 42 that terminates in an appropriate connector for a computer port, such as a USB port, RS232 serial port or parallel port. The Communications Module 40 allows the compact printer system to be connected to a computer. When so connected, images can be transferred between the computer and the various modules of the compact printer system. The communications module allows captured images to be downloaded to the computer, and new images for printing to be uploaded into the printer module 10.

A Flash Module 50 is shown in FIG 5. The Flash Module 50 is used to generate a flash with flash cell 51 when taking photographs with the Camera Module 20. The Flash Module attaches to other modules via female connector 52 and male connector 53. It contains its own power source. The Flash Module is automatically selected by the Camera Module when required. A simple switch allows the Flash Module to be explicitly turned off to maximize battery life.

FIG 6 shows a Timer Module 60 that is used to automate the taking of multiple photos with the Camera Module 20, each photo separated by a specific time interval. The captured photos are stored in Memory Module 30. Any flash requirements are handled by the Camera Module 20, and can therefore be ignored by the Timer Module. The Timer Module 60 consists of a body 61 housing a LCD 62, START/STOP button 63 and UNITS button 64. A SELECT button 65 allows the user to select time units and the number of units are set by UNITS button 64. The Timer Module 60 includes a male connector 66 and female connector 67. The Timer Module takes its power from the Printer Module 10 via the Serial Bus.

A Laser Module 70 is shown in FIG 7. The Laser Module 70 consists of a body 71 containing a conventional laser pointer operated by button 72. As the Laser Module is a terminal module it only has one connector, which in the example is a male connector 73. The Laser Module is an isolated module, in that it does not perform any image capture, storage, or processing. It exists as a functional addition to the compact printer system. It is provided because laser pointer services are typically incorporated into other pen-like devices. The Laser Module contains its own power supply and does not appear as a device on the Serial Bus.

The Effects Module shown in FIG 8 is an image processing module. It allows a user to select a number of effects and applies them to the current image stored in the Printer Module 10. The effects include borders, clip-art, captions, warps, color changes, and painting styles. The Effects Module comprises a body 81 housing custom electronics and a LCD 82. A CHOOSE button 83 allows a user to choose between a number of different types of effects. A SELECT button 84 allows the user to select one effect from the number of effects of the chosen type. Pressing the APPLY button 85 applies the effect to image stored in the Printer Module 10. The Effects Module obtains power from the Serial Bus. Male connector 86 and female connector 87 allow the Effects Module to be connected to other compact printer system modules.

FIG 9 shows a Character Module 90 that is a special type of Effects Module (described above) that only contains character clip-art effects of a given topic or genre. Examples include The Simpsons®, Star Wars®, Batman®, and Dilbert® as well as company specific modules for McDonalds® etc. As such it is an image processing module. It consists of a body 91 housing custom electronics and a LCD 92. SELECT button 93 allows the user to choose the effect that is to be applied with APPLY button 94. The Character Module obtains power from the Serial Bus through male connector 95 and female connector 96.

The Adaptor Module 100, shown in FIG 10, is a female/female connector that allows connection between two modules that terminate in male connectors. A male/male connector (not shown) allows connection between two modules that terminate in female connectors. The Adaptor Module is a housekeeping module, in that it facilitates the use of other modules, and does not perform any specific processing of its own.

All "through" modules have a male connector at one end, and a female connector at the other end. The modules can therefore be chained together, with each module connected at either end of the chain. However some modules, such as the Laser Module 70, are terminating modules, and therefore have either a male or female connector only. Such single-connector modules can only be connected at one end of the chain. If two such modules are to be connected at the one time, an Adaptor Module 100 is required.

FIG 11 shows a Pen Module 110 which is a pen in a module form. It is an isolated module in that it attaches to the compact printer system but is completely independent of any other module. It does not consume or require any power. The Pen Module is defined because it is a convenient extension of a pen shaped, pen sized device. It may also come with a cap 111. The cap may be used to keep terminating connectors clean in the case where the chain ends with a connector rather than a terminating module.

To assist with accurately feeding a business card sized print media into slot 13 of the printer module 10, a dispenser module 120 is provided as shown in FIG12. The dispenser module 120 comprises a body 121 that holds a store of business card sized print media. A Printer Module 10 locates into socket 122 on the dispenser module

120. When correctly aligned, a card dispensed from the dispenser module by slider
123 enters slot 13 and is printed.

In the sense that a minimum configuration compact printer system must be
able to print out photos, a minimum compact printer configuration contains at least a
Printer Module 10. The Printer Module holds a single photographic image that can be
printed out via its Memjet printer. It also contains the 3V battery required to power
the compact printer system.

In this minimum configuration, the user is only able to print out photos. Each
time a user inserts a business card 130 into the slot in the Printer Module, the image in
the Printer Module is printed onto the card. The same image is printed each time a
business card is inserted into the printer. In this minimum configuration there is no
way for a user to change the image that is printed. The dispenser module 120 can be
used to feed cards 130 into the Printer Module with a minimum of fuss, as shown in
FIG 13.

By connecting a Camera Module 20 to the minimum configuration compact
printer system the user now has an instant printing digital camera in a pen, as shown
in FIG 14. The Camera Module 20 provides the mechanism for capturing images and
the Printer Module 10 provides the mechanism for printing them out. The battery in
the Printer Module provides power for both the camera and the printer.

When the user presses the "Take" button 27 on the Camera Module 20, the
image is captured by the camera 24 and transferred to the Printer Module 10. Each
time a business card is inserted into the printer the captured image is printed out. If
the user presses "Take" on the Camera Module again, the old image in the Printer
Module is replaced by the new image.

If the Camera Module is subsequently detached from the compact printer
system, the captured image remains in the Printer Module, and can be printed out as
many times as desired. The Camera Module is simply there to capture images to be
placed in the Printer Module.

FIG 15 shows a further configuration in which a Memory Module 30 is
connected to the configuration of FIG 14. In the embodiment of FIG 15, the user has
the ability to transfer images between the Printer Module 10 and a storage area
contained in the Memory Module 30. The user selects the image number on the
Memory Module, and then either sends that image to the Printer Module (replacing
whatever image was already stored there), or brings the current image from the Printer

Module to the specified image number in the Memory Module. The Memory Module also provides a way of sending sets of thumbnail images to the Printer Module.

Multiple Memory Modules can be included in a given system, extending the number of images that can be stored. A given Memory Module can be disconnected
5 from one compact printer system and connected to another for subsequent image printing.

With the Camera Module 20 attached to a Memory Module/Printer Module compact printer system, as shown in FIG 15, the user can "Take" an image with the Camera Module, then transfer it to the specified image number in the Memory
10 Module. The captured images can then be printed out in any order.

By connecting a Communications Module 40 to the minimum configuration compact printer system, the user gains the ability to transfer images between a PC and the compact printer system. FIG 16 shows the configuration of FIG 15 with the addition of a Communications Module 40. The Communications Module makes the
15 Printer Module 10 and any Memory Modules 30 visible to an external computer system. This allows the download or uploading of images. The communications module also allows computer control of any connected compact printer modules, such as the Camera Module 20.

In the general case, the Printer Module holds the "current" image, and the
20 other modules function with respect to this central repository of the current image. The Printer Module is therefore the central location for image interchange in the compact printer system, and the Printer Module provides a service to other modules as specified by user interaction.

A given module may act as an image source. It therefore has the ability to
25 transfer an image to the Printer Module. A different module may act as an image store. It therefore has the ability to read the image from the Printer Module. Some modules act as both image store and image source. These modules can both read images from and write images to the Printer Module's current image.

The standard image type has a single conceptual definition. The image definition is derived from the physical attributes of the printhead used in the Printer Module. The printhead is 2 inches wide and prints at 1600dpi in cyan, magenta and yellow bi-level dots. Consequently a printed image from the compact printer system is

5 3200 bi-level dots wide.

The compact printer system prints on business card sized pages (85mm x 55mm). Since the printhead is 2 inches wide, the business cards are printed such that 1 line of dots is 2 inches. 2 inches is 50.8mm, leaving a 2mm edge on a standard business-card sized page. The length of the image is derived from the same card size

10 with a 2mm edge. Consequently the printed image length is 81mm, which equals 5100 1600dpi dots. The printed area of a page is therefore 81mm x 51mm, or 5100 x 3200 dots.

To obtain an integral contone to bi-level ratio a contone resolution of 267 ppi (pixels per inch) is chosen. This yields a contone CMY page size of 850 x 534, and a

15 contone to bi-level ratio of 1:6 in each dimension. This ratio of 1:6 provides no perceived loss of quality since the output image is bi-level.

The printhead prints dots in cyan, magenta, and yellow ink. The final output to the printed page must therefore be in the gamut of the printhead and take the attributes of the inks into account. It would at first seem reasonable to use the CMY color space to represent images. However, the printer's CMY color space does not have a linear

20 response. This is definitely true of pigmented inks, and partially true for dye-based inks. The individual color profile of a particular device (input and output) can vary considerably. Image capture devices (such as digital cameras) typically work in RGB (red green blue) color space, and each sensor will have its own color response

25 characteristics.

Consequently, to allow for accurate conversion, as well as to allow for future image sensors, inks, and printers, the CIE $L^*a^*b^*$ color model [CIE, 1986, CIE 15.2 Colorimetry: Technical Report (2nd Edition), Commission Internationale De l'Eclairage] is used for the compact printer system. $L^*a^*b^*$ is well defined,

30 perceptually linear, and is a superset of other traditional color spaces (such as CMY, RGB, and HSV).

The Printer Module must therefore be capable of converting $L^*a^*b^*$ images to the particular peculiarities of its CMY color space. However, since the compact printer system allows for connectivity to PCs, it is quite reasonable to also allow

highly accurate color matching between screen and printer to be performed on the PC. However the printer driver or PC program must output $L^*a^*b^*$.

Each pixel of a compact printer image is therefore represented by 24 bits: 8 bits each of L^* , a^* , and b^* . The total image size is therefore 1,361,700 bytes (850 x 534 x 3).

Each image processing module is able to access the image stored in the Printer Module. The access is either to read the image from the Printer Module, or to write a new image to the Printer Module.

The communications protocol for image access to the Printer Module provides a choice of internal image organization. Images can be accessed either as 850 x 534 or as 534 x 850. They can also be accessed in interleaved or planar format. When accessed as interleaved, each pixel in the image is read or written as 24 bits: 8 bits each of L^* , a^* , b^* . When accessed as planar, each of the color planes can be read or written independently. The entire image of L^* pixels, a^* pixels or b^* pixels can be read or written at a time.

To provide the required control functions and image processing the print module 10 includes an application specific integrated circuit configured as a printer controller. A block schematic of the controller is shown in FIG 17. Each element of the controller is described in detail below together with examples of operation of the elements. The controller is designed to be fabricated using a 0.25 micron CMOS process, with approximately 9 million transistors, almost half of which are flash memory or static RAM. This leads to an estimated area of 16mm^2 . The controller contains:

- a CPU/microcontroller core;
- program storage memory, which is suitably 8 Kbytes of flash memory;
- program variable storage, which is suitably 2 KByte of RAM;
- a parallel interface;
- an Image Access Unit and associated image storage memory; and
- a Printhead Interface.

The controller may also include a number of housekeeping and administration elements including;

- a Serial Bus Interface;
- 2 QA Chip interfaces;
- a joint test action group (JTAG) interface;

- a clock; and
- a memory decoder.

The controller is intended to run at a clock speed of approximately 48 MHz on 3V externally and 1.5V internally to minimize power consumption. The actual
5 operating frequency will be an integer multiple of the Serial Bus operating frequency. The CPU is intended to be a simple micro-controller style CPU, running at about 1 MHz, and can be a vendor supplied core.

Referring to FIG 17 the controller 170 incorporates a simple micro-controller CPU core 171 to synchronize the image capture and printing image processing chains
10 and to perform general operating system duties including the user-interface. A wide variety of CPU cores are suitable, it can be any processor core with sufficient processing power to perform the required calculations and control functions fast enough to meet consumer expectations.

Since all of the image processing is performed by dedicated hardware, the
15 CPU does not have to process pixels. As a result, the CPU can be extremely simple. However it must be fast enough to run a stepper motor to advance the card during a print (the stepper motor requires a 5KHz process). An example of a suitable core is a Philips 8051 micro-controller running at about 1 MHz.

Associated with the CPU Core 171 is a Program ROM 172 and a small
20 Program Scratch RAM 173. The CPU 171 communicates with the other units within the controller via memory-mapped I/O supported by a Memory Decoder 174. Particular address ranges map to particular units, and within each range, to particular registers within that particular unit. This includes the serial and parallel interfaces.

The CPU Memory Decoder 174 is a simple decoder for satisfying CPU data
25 accesses. The Decoder translates data addresses into internal controller register accesses over the internal low speed bus 175, and therefore allows for memory mapped I/O of controller registers. The bus 175 includes address lines 175a and data or control lines 175b.

The small Program Flash ROM 172 is incorporated into the controller to store
30 simple sequences for controlling the stepper motor and other functions (expanded below). The ROM size depends on the CPU chosen, but should not be more than 8 Kbytes.

Likewise, a small scratch RAM 173 is incorporated into the controller for, primarily, program variable storage. Since the program code does not have to

manipulate images, there is no need for a large scratch area. The RAM size depends on the CPU chosen (e.g. stack mechanisms, subroutine calling conventions, register sizes etc.), but should not be more than about 2Kbytes

The optional Serial Bus interface 176, is connected to the internal chip low-speed bus 175. The Serial Bus is controlled by the CPU 171 and preferably follows the USB protocol, although other protocols may be suitable. The Serial Bus is described in a co-pending application referred to above. The Serial Bus interface 176 allows the transfer of images to and from the Printer Module 10, by external control from the camera module 20, memory module 30, effects module 80, other modules or a computer. For example, the memory module 30 sends and receives images using the USB protocol on the Serial Bus.

The parallel interface 177 connects the controller to individual static electrical signals. The CPU 171 is able to control each of these connections as memory-mapped I/O via the low-speed bus 175. The following table shows the connections to the parallel interface.

Connections to Parallel Interface		
Connection	Direction	Pins
Paper transport stepper motor	Out	4
Nozzle capping solenoid (optional)	Out	1
Buttons	In	2

As indicated in the table, the parallel interface 177 provides communication to a stepper motor 187 in the printer module 10 and can receive signals from buttons 188 (such as a paper sensor to detect the presence of printable media in the printer module).

There are two optional low-speed serial interfaces 178, 179 connected to the internal low-speed bus 175. A first interface 178 connects to a QA chip 189 in the ink cartridge of the printer module 10. The second interface connects to a QA chip 190 on the print module 10. The reason for having two interfaces is to connect to both the on-module QA Chip 190 and to the ink cartridge QA Chip 189 using separate lines. The two QA chips are implemented as Authentication Chips. If only a single line is used, a clone ink cartridge manufacturer could usurp the authentication mechanism and provide a non-proprietary cartridge.

A CPU-mediated protocol between the two QA chips is used to authenticate

the ink cartridge. The controller can then retrieve ink characteristics from the ink cartridge QA chip, as well as the remaining volume of each color ink. The controller uses the ink characteristics to properly configure the printhead 186. It uses the remaining ink volumes, updated on a page-by-page basis with ink consumption information accumulated by the Printhead Interface 180, to ensure that it never allows the printhead to be damaged by running dry.

The Image Storage Memory 181 is used to store the current print image. It is suitably multi-level Flash RAM (2-bits per cell) so that the image is retained after the power has been shut off. It is referred to as ImageRAM for convenience. The image held in ImageRAM is kept in an interleaved format (the color components for a given pixel are stored together). Images are stored in one of two formats: either as CMY or L*a*b*, with each image represented by 850 lines containing 534 sets of 3 8-bit color samples each.

The total amount of memory required for the interleaved linear CMY/L*a*b* image is 1,361,700 bytes (approximately 1.3 MB). The image is written to ImageRAM by the Image Access Unit 182, and read by both the Image Access Unit 182 and the Print Generator Unit 193 of the printhead interface 180. The CPU does not have direct random access to this image memory. It must access the image pixels via the Image Access Unit 182.

The Image Access Unit (IAU) 182 is the means for the controller to access the image in ImageRAM 181. The controller can read pixels from the image in the image storage memory and write pixels back. The IAU allows planar and interleaved access. It also allows for 90 degrees rotation.

Pixels are read by the controller when the image is to be transferred to another Module. Pixels are written by the controller when the image is being loaded from another Module. The registers of the IAU allow pixel transfers to be planar, interleaved or rotated by 90 degrees as desired.

The Image Access Unit 182 is a straightforward access mechanism to ImageRAM 181, and operates via the register set as shown in the following table.

IAU Registers		
Name	Bits	Description
ImageAddress	21	Address to read or write in ImageRAM
Delta12	12	Amount to add to ImageAddress when stepping from one pixel to the next in reads/writes for the first 2 of each set of 3.
Delta3	12	Amount to add to ImageAddress when stepping from one pixel to the next in reads/writes during the 3rd access of each set of 3.
Mode	3	0 = Read from ImageAddress into Value. 1 = Write Value to ImageAddress.
Value	8	Value stored at ImageAddress (if Mode = Read) Value to store at ImageAddress (if Mode = Write)

The data is read from or written to the appropriate address in Image RAM whenever the Value register is read from or written to, according to the sense of Mode. Interleaved/planar and rotated access is accomplished via the two Delta registers. The values are set as shown in the following table.

Register Settings for Different Image Access Modes				
Access Type	Image Read or Written as	Image Address	Delta12	Delta3
Interleaved (each pixel 3 colors)	850 rows x 534 pixels	0	1	1
	534 rows x 850 pixels	0	1	1600 ^a
Planar - plane N (each pixel 1 color)	850 rows x 534 pixels	N	3	3
	534 rows x 850 pixels	N	1602 ^b	1602
^a	534x3-2			
^b	534x2			

The controller 170 may also include a clock phase-locked loop 184 that provides timing signals to the controller. The clock 184 draws a base signal from crystal oscillator 185. Some CPU include a clock so the clock 184 and crystal 185 would not be required.

A standard JTAG (Joint Test Action Group) Interface 183 is included in the controller for testing purposes. Due to the complexity of the controller, a variety of testing techniques are required, including BIST (Built In Self Test) and functional block isolation. An overhead of 10% in chip area is assumed for overall chip testing circuitry.

The Printhead Interface (PHI) 180 is the means by which the controller loads the printhead 186 with the dots to be printed, and controls the actual dot printing process. The following description describes one implementation of a method of converting the image stored in ImageRam to image printed on a card.

The Printhead Interface 180 is a wrapper for a number of units as shown in FIG 18, including:

- a Memjet Interface (MJI) 191, which transfers data to the Memjet printhead 186, and controls the nozzle firing sequences during a print;
- a pair of Line Synchronization Generator units (LSGU) 192, which provide synchronization signals for the MJI 191 and the stepper motors 187; and
- a Print Generator Unit (PGU) 193 which takes an image from the ImageRAM 181 (in L*a*b* or CMY) and produces a 1600 dpi dithered CMY image in real time as required by the Memjet Interface 191. In addition, the PGU has a Test Pattern mode, which enables the CPU 171 to specify precisely which nozzles are fired during a print.

The units within the PHI are controlled by a number of registers that are programmed by the CPU 171.

In the PHI 180 there are two LSGUs 192. The first LSGU 192a produces LineSync0, which is used to control the Memjet Interface 191. The second LSGU 192b produces LineSync1 which is used to pulse the paper drive stepper motor 187.

The LineSyncGen units 192 are responsible for generating the synchronization pulses required for printing a page. Each LSGU produces an external LineSync signal to enable line synchronization. The generator inside the LGSU generates a LineSync pulse when told to 'go', and then every so many cycles until told to stop. The LineSync pulse defines the start of the next line.

The exact number of cycles between LineSync pulses is determined by the CyclesBetweenPulses register, one per generator. It must be at least long enough to allow one line to print (200 ms for the low speed printing) and another line to load, but can be longer as desired (for example, to accommodate special requirements of paper transport circuitry). If the CyclesBetweenPulses register is set to a number less than a line print time, the page will not print properly since each LineSync pulse will arrive before the particular line has finished printing.

The following table shows the interface registers contained in the LSGU:

LineSyncGen Unit Registers	
Register Name	Description
CyclesBetweenPulses	The number of cycles to wait between generating one LineSync pulse and the next.

Go	Controls whether the LSGU is currently generating LineSync pulses or not. A write of 1 to this register generates a LineSync pulse, transfers CyclesBetweenPulses to CyclesRemaining, and starts the countdown. When CyclesRemaining hits 0, another LineSync pulse is generated, CyclesBetweenPulses is transferred to CyclesRemaining and the countdown is started again. A write of 0 to this register stops the countdown and no more LineSync pulses are generated.
CyclesRemaining	A status register containing the number of cycles remaining until the next LineSync pulse is generated.

The Memjet Interface (MJl) 191 connects the controller 170 to the Memjet printhead 186, providing both data and appropriate signals to control the nozzle loading and firing sequences during a print.

The Memjet Interface 191 is a state machine which follows the printhead loading and firing order described, and includes the functionality of a preheat cycle and a cleaning cycle. The MJl 191 loads data into the printhead from a choice of two data sources:

- All 1s. This means that all nozzles will fire during a subsequent print cycle, and is the standard mechanism for loading the printhead for a preheat or cleaning cycle;
- From a 12-bit input held in a transfer register of the PGU 193. This is the standard means of printing an image, whether it is a photo or test pattern. The 12-bit value from the PGU is directly sent to the printhead and a 1-bit 'Advance' control pulse is sent to the PGU.

The MJl 191 knows how many lines it has to print for the page. When the MJl is told to 'go', it waits for a LineSync pulse before it starts the first line. Once it has finished loading/printing a line, it waits until the next LineSync pulse before starting the next line. The MJl stops once the specified number of lines has been loaded and/or printed, and ignores any further LineSync pulses.

The MJl is started after the PGU has already prepared the first 12-bit transfer value. This is so the 12-bit data input will be valid for the first transfer to the printhead. The MJl is therefore directly connected to the PGU, LineSync0, and the external Memjet printhead.

The following table shows the connections between the MJl 191 and the Memjet printhead 186.

Printhead Connections			
Name	#Pins	I/O	Description
ChromapodSelect	4	0	Select which chromapod will fire (0-9)
NozzleSelect	4	0	Select which nozzle from the pod will fire (0-9)
Aenable	1	0	Firing pulse for phasegroup A
Benable	1	0	Firing pulse for phasegroup B
CDataIn[0-3]	4	0	Cyan output to cyan shift register of segments 0-3
MDataIn[0-3]	4	0	Magenta input to magenta shift register of segments 0-3
YDataIn[0-3]	4	0	Yellow input to yellow shift register of segments 0-3
SRClock	1	0	A pulse on SRClock (ShiftRegisterClock) loads the current values from CDataIn[0-3], MDataIn[0-3] and YDataIn[0-3] into the 12 shift registers of the printhead
Ptransfer	1	0	Parallel transfer of data from the shift registers to the printhead's internal NozzleEnable bits (one per nozzle).
SenseSegSelect	1	0	A pulse on SenseSegSelect ANDed with data on CDataIn[n] selects the sense lines for segment n.
Tsense	1	I	Temperature sense
Vsense	1	I	Voltage sense
Rsense	1	I	Resistivity sense
Wsense	1	I	Width sense

The duration of firing pulses on the AEnable and BEnable lines depend on the viscosity of the ink (which is dependent on temperature and ink characteristics) and the amount of power available to the printhead. The typical pulse duration range is 1.3 to 1.8 ms. The MJI therefore contains a programmable pulse duration table, indexed by feedback from the printhead. The table of pulse durations allows the use of a lower cost power supply, and aids in maintaining more accurate drop ejection.

The Pulse Duration table has 256 entries, and is indexed by the current Vsense and Tsense settings. The upper 4-bits of address come from Vsense, and the lower 4-bits of address come from Tsense. Each entry is 8 bits, and represents a fixed point value in the range of 0-4ms.

The 256-byte table is written by the CPU 171 before printing the image. Each 8-bit pulse duration entry in the table combines:

- Brightness settings
- Viscosity curve of ink (from the ink cartridge QA Chip189)
- Rsense
- Wsense
- 5 • Tsense
- Vsense

The MJJ maintains a count of the number of dots of each color fired from the printhead. The dot count for each color is a 24-bit value, individually cleared under processor control. Each dot count can hold a maximum coverage dot count of a single
10 3-inch print, so in typical usage, the dot count will be read and cleared after each print.

The dot counts are used by the CPU to update the QA chip in order to predict when the ink cartridge will run out of ink. The processor knows the volume of ink in the cartridge for each of C, M, and Y from the QA chip. Counting the number of
15 drops eliminates the need for ink sensors, and prevents the ink channels from running dry. An updated drop count is written to the QA chip after each print. A new image will not be printed unless there is enough ink left, and allows the user to change the ink without getting a dud photo that must be reprinted.

The CPU communicates with the MJJ via a register set. The registers allow the
20 CPU to parameterize a print as well as receive feedback about print progress. The following registers are contained in the MJJ:

Memjet Interface Registers	
Register Name	Description
Print Parameters	
NumTransfers	The number of transfers required to load the printhead (usually 800). This is the number of pulses on the SRClock and the number of 12-bit data values to transfer for a given line.
NumLines	The number of Load/Print cycles to perform.
Monitoring the Print	
Status	The Memjet Interface's Status Register
LinesRemaining	The number of lines remaining to be printed. Only valid while Go=1. Starting value is NumLines and counts down to 0.
TransfersRemaining	The number of transfers remaining before the Printhead is considered loaded for the current line. Only valid while Go=1. Starting value is NumTransfers and counts down to 0.
SenseSegment	The 4-bit value to place on the Cyan data lines during a subsequent feedback SenseSegSelect pulse. Only 1 of the 4 bits should be set, corresponding to one of the 4 segments.
SetAllNozzles	If non-zero, the 12-bit value written to the printhead during the

PP07US

The MJJ's Status Register is a 16-bit register with bit interpretations as follows:

MJJ Status Register		
Name	Bits	Description
LoadingDots	1	If set, the MJJ is currently loading dots, with the number of dots remaining to be transferred in TransfersRemaining. If clear, the MJJ is not currently loading dots
PrintingDots	1	If set, the MJJ is currently printing dots. If clear, the MJJ is not currently printing dots.
PrintingA	1	This bit is set while there is a pulse on the AEnable line
PrintingB	1	This bit is set while there is a pulse on the BEnable line
FeedbackValid	1	This bit is set while the feedback values Tsense, Vsense, Rsense, and Wsense are valid
Reserved	3	-
PrintingChromapod	4	This holds the current chromapod being fired while the PrintingDots status bit is set.
PrintingNozzles	4	This holds the current nozzle being fired while the PrintingDots status bit is set.

The following pseudocode illustrates the logic required to load a printhead for a single line. Note that loading commences only after the LineSync pulse arrives. This is to ensure the data for the line has been prepared by the PGU and is valid for the first transfer to the printhead.

```

Wait for LineSync
For TransfersRemaining = NumTransfers to 0
    If (SetAllNozzles)
        Set all ColorData lines to be 1
    Else
        Place 12 bit input on 12 ColorData lines
    EndIf
    Pulse SRClock
    Wait 12 cycles
    Send ADVANCE signal
EndFor

```

The Cleaning and Preheat cycles are accomplished by setting appropriate registers in the MJJ:

- SetAllNozzles = 1
- Set the PulseDuration register to either a low duration (in the case of the preheat mode) or to an appropriate drop ejection duration for cleaning mode.
- Set NumLines to be the number of times the nozzles should be fired

- Set the Go bit and then wait for the Go bit to be cleared when the print cycles have completed.

The LSGU must also be programmed to send LineSync pulses at the correct frequency.

5 From the simplest point of view, the PGU 193 provides the interface between the Image RAM 181 and the Memjet Interface 191. The elements of the PGU are shown schematically in FIG 19. Two image processing chains are evident. The first, the Test Pattern mode, simply reads data directly from Image RAM 181, and formats in Test Pattern Access Unit (TPAU) 194 into output buffer 195 ready for output to the

10 MJI 191. The second print chain contains the majority of functions required for printing an image. A conversion processor 196 converts L*a*b* format images to CMY format and stores the result in contone buffer 197. An Up-Interpolate, Halftone and Reformat for Printer Unit (UHRU) 198 massages the content of contone buffer 197 for the output buffer 195, and hance the memjet interface 191. The PGU takes as

15 input a variety of parameters, including L*a*b* to CMY conversion tables and printing timing parameters. The conversion processor 196 and the UHRU unit 198 run in parallel. The buffer sizes are shown in the following table.

Buffer sizes for Print Generator Unit		
Buffer	Size(bytes)	Composition of Buffer
Buffer 1	5	3 x 12 bits
Buffer 2	9,612	3 colors(CMY) x 6 lines x 534 contone pixels @ 8-bits each

20 Apart from a number of registers, some of the processes have significant lookup tables or memory components. These are summarized in the following table.

Memory requirements within PGU Processes		
Unit	Size (bytes)	Composition of Requirements
Test Pattern Access	0	
Convert L*a*b* to CMY	14,739	3 conversion tables, each 17x17x17x8-bits
UpInterpolate / Halftone / Reformat	2,500	Dither Cell, 50x50x8-bits

25 The output buffer 195 holds the generated dots from the Print Generation process. It consists of a 12-bit shift register to hold dots generated one at a time from the UHRU 197, three 4-bit registers to hold the data generated from the TPAU 194, and a 12-bit register used as the buffer for data transfer to the MJI 191. A pulse on either the Advance line from the MJI, or the TransferWriteEnable from both the

TPAU and the UHRU, loads the 12-bit Transfer register with all 12-bits, either from the three 4-bit registers or the single 12-bit shift register. The output buffer 195 therefore acts as a double buffering mechanism for the generated dots.

5 The contone buffer 197 holds six lines of the calculated CMY contone image. The contone buffer is generated by the conversion processor 196, and is accessed by the UHRU 198 in order to generate output dots for the printer.

10 The size of the Contone Buffer is dependent on the physical distance between the nozzles on the printhead. As dots for one color are being generated for one physical line, dots for a different color on a different line are being generated. The net effect is that six different physical lines are printed at the one time from the printer - odd and even dots from different output lines, and different lines per color.

15 Since the ratio of 534-res lines to 1600dpi lines is 1:6, each contone pixel is sampled six times in each dimension. For the purposes of buffer lines, we are only concerned with 1 dimension, so only consider 6 dot lines coming from a single pixel line. The distance between nozzles of different colors is 4-8 dots (depending on Memjet parameters). We therefore assume 8, which gives a separation distance of 16 dots, or 17 dots in inclusive distance. The worst case scenario is that the 17 dot lines includes the last dot line from a given pixel line. This implies 5 pixel lines, with dot lines generated as 1, 5, 5, 5, 1, and allows an increase of nozzle separation to 10.

20 To ensure that the contone generation process writing to the buffer does not interfere with the dot generation process reading from the buffer, we add an extra line per color, for a total of six lines per color.

25 The contone buffer is therefore three colors of six lines, each line containing 534 8-bit contone values. The total memory required is $3 \times 6 \times 534 = 9,612$ bytes (9.5 Kbytes). The memory only requires a single 8-bit read per cycle, and a single 8-bit write every 36 cycles (each contone pixel is read 36 times). The contone buffer can be implemented as single cycle double access (read and write) RAM running at the nominal speed of the printhead dot generation process. The contone buffer is set to white (all 0) before the start of the print process.

30 The Test Pattern Access process is the means by which test patterns are produced. Under normal user circumstances, this process will not be used. It is primarily for diagnostic purposes and is not described in detail. Persons skilled in the art will be aware of suitable processes for producing test patterns.

The operation of the conversion processor 196 to convert from L*a*b* to CMY is described in a co-pending application titled Color Conversion Method for Compact Printer System. The conversion is optional since the input data may already be in CMY format. In the latter case the data is simply passed through with no change.

The conversion is performed as tri-linear interpolation. Three 17 x 17 x 17 lookup tables are used for the conversion process: L*a*b* to Cyan, L*a*b* to Magenta, and L*a*b* to Yellow. However, since there are 36 cycles to perform each tri-linear interpolation, there is no need for a fast tri-linear interpolation unit. Instead, 8 calls to a linear interpolation process is more than adequate.

The input to the Up-interpolate, Halftone and Reformat Unit (UHRU) is the contone buffer 197 containing the partial CMY image. The output is a set of 12-bit values in the correct order to be sent to the Memjet Interface for subsequent output to the printhead via output buffer 195. The 12 output bits are generated 1 bit at a time, and sent to the 12-bit shift register in the output buffer.

The control of this process occurs from the Advance signal from the MJ1 and the LineSync0 pulse from the LSGU. When the UHRU starts up, and after each LineSync0 pulse, 12 bits are produced, and are clocked into the 12-bit shift register of output buffer 195. After the 12th bit has been clocked in, a TransferWriteEnable pulse is given to the output buffer and the next 12 bits are generated. After this, the UHRU waits for the Advance pulse from the MJ1. When the Advance pulse arrives, the TransferWriteEnable pulse is given to the output buffer, and the next 12 bits are calculated before waiting again. In practice, once the first Advance pulse is given, synchronization has occurred and future Advance pulses will occur every 12 cycles thereafter.

The UpInterpolate, Halftone and Reformat process is shown schematically in FIG 20.

The 534 x 850 CMY image is up-interpolated to the final print resolution (3200 x 5100). The ratio is 1:6 in both dimensions. Although it is certainly possible to bi-linearly interpolate the 36 values (1:6 in both X and Y dimensions), the resultant values will not be printed contone. The results will be dithered and printed bi-level. Given that the contone 1600 dpi results will be converted into dithered bi-level dots, the accuracy of bi-linear interpolation from 267 dpi to 1600 dpi will not be visible

(the image resolution was chosen for this very reason). Pixel replication will therefore produce good results.

Pixel replication involves taking a single pixel, and using it as the value for a larger area. In this case, a single pixel is replicated to 36 pixels (a 6x6 block). If each pixel were contone, the result may appear blocky, but since the pixels are to be dithered, the effect is that the 36 resultant bi-level dots take on the contone value.

The printhead is only capable of printing dots in a bi-level fashion. It is therefore necessary to convert from the contone CMY to a dithered CMY image. More specifically, a dispersed dot ordered dither is produce using a stochastic dither cell 200, converting a contone CMY image into a dithered bi-level CMY image.

The 8-bit 1600 dpi contone value is compared in unsigned comparator 199 to the current position in the dither cell. If the 8-bit contone value is greater than the dither cell value, an output bit of 1 is generated. Otherwise an output bit of 0 is generated. This output bit will eventually be sent to the printhead and control a single nozzle to produce a single C, M, or Y dot. The bit represents whether or not a particular nozzle will fire for a given color and position.

The same position in the dither cell can be used for C, M, and Y. This is because the actual printhead produces the C, M, and Y dots for different lines in the same print cycle. The staggering of the different colored dots effectively gives staggering in the dither cell.

The size of the dither cell depends on the resolution of the output dots. Since 1600 dpi dots are produced, the cell size should be larger than 32 x 32. In addition, to allow the dot processing order to match the printhead segments, the size of the dither cell should ideally divide evenly into 800 (since there are 800 dots in each segment of the printhead).

A dither cell size of 50 x 50 is large enough to produce high quality results, and divides evenly into 800 (16 times). Each entry of the dither cell is 8 bits, for a total of 2500 bytes (approximately 2.5 KB).

The final process before being sent to the printer is for the dots to be formatted into the correct order for being sent to the printhead. The dots must be sent to the printhead in the correct order - 12 dots at a time for a 2 inch printhead.

The dots are produced in the correct order for printing by the up-interpolate and dither functions. Those dot values (each value is 1 bit) can simply be collected,

and sent off in groups of 12. The 12 bit groups can then be sent to the printhead by the Memjet Interface 191.

5 In order to halftone 9,600 contone pixels, 9,600 contone pixels must be read in. The Address Generator Unit 201 performs this task, generating the addresses into the contone buffer, which effectively implements the UpInterpolate task. The Address Generator Unit also performs the reformatting task, as described above, and the addressing for the staggered dither cell 200.

10 The printhead interface 180 therefore performs the bulk of the image formatting tasks. The image stored in the image storage memory 181 is translated by the printhead interface 180 into a suitable format to drive the nozzles in the Memjet printhead 186. The CPU 171 is responsible for housekeeping and administration tasks to operate the printer module 10, but not the image formatting tasks.

15 Throughout the specification the aim has been to describe the preferred embodiments of the invention without limiting the invention to any one embodiment or specific collection of features. Persons skilled in the relevant art may realize variations from the specific embodiments that will nonetheless fall within the scope of the invention.

CLAIMS

1. A method of controlling a printer module having a printhead that prints an image on printable media, said method including the steps of:
storing an image in image storage memory;
5 sensing the presence of printable media in the printer module;
activating a motor to advance said printable media past said printhead in said printer module;
retrieving said image from said image storage memory;
transforming said image to a form suitable for said printhead; and
10 transferring said transformed image to said printhead in a synchronous manner for printing by said printhead on said printable media.
2. The method of claim 1 wherein said step of storing an image in image storage memory includes transferring an image from an image capture means to said image storage memory.
- 15 3. The method of claim 1 wherein the step of transforming said image includes transforming said image to a dithered CMY image for printing by said printhead.
4. The method of claim 3 wherein said CMY image has a resolution of 1600dpi.
5. The method of claim 1 wherein said image is stored in image storage memory in L*a*b* format and said step of transforming said image further includes the step of
20 converting said image from L*a*b* format to CMY format.
6. The method of claim 5 wherein said step of converting said image from L*a*b* format to CMY format is a tri-linear interpolation process.
7. The method of claim 1 wherein the step of transforming said image further includes the steps of:
25 up-interpolating said image to a suitable resolution for printing;
dithering pixels in said image; and
formatting said image so that said image is represented by a dot function, each dot corresponding to an ink nozzle of said printhead.
8. The method of claim 1 wherein the step of dithering the image converts
30 contone CMY to dithered bi-level CMY.
9. The method of claim 1 wherein said step of printing includes a further step of preheating and/or cleaning nozzles in said printhead.
10. A method of printing an image from image storage memory in a printer module including the steps of:

retrieving said image from said image storage memory;
transforming said image to a form suitable for a printhead; and
transferring said transformed image to said printhead in a synchronous manner for
printing by said printhead on a printable media.

5 11. The method of claim 10 wherein the step of transforming said image further
includes the steps of:

up-interpolating said image to a suitable resolution for printing;

dithering pixels in said image; and

10 formatting said image so that said image is represented by a dot function, each dot
corresponding to an ink nozzle of said printhead.

12. A controller for a printer module having a printhead that prints an image on
printable media, said controller comprising:

a central processing unit;

15 program memory associated with said central processing unit, said program memory
storing program steps for execution by said central processing unit to operate said
printer module to print said image;

one or more interface units communicating with components of said printer module;
image storage memory storing said image; and

20 an image access unit in communication with said image storage memory, said central
processing unit and a printhead interface, said image access unit accessing said image
in said image storage memory and transferring said image to said printhead interface
on command from said central processing unit;

wherein said printhead interface transforms said image for printing by a printhead.

25 13. The controller of claim 12 further comprising scratch memory associated with
said central processing unit for variable storage.

14. The controller of claim 12 further comprising a serial bus interface
communicating with a Serial Bus of a compact printer system including one or more
further modules, said Serial Bus communicating power and data between said printer
module and said one or more further modules.

30 15. The controller of claim 14 wherein said data includes image data stored in said
image storage memory.

16. The controller of claim 12 wherein said central processing unit is a micro-
controller running at about 1 Mhz.

17. The controller of claim 12 wherein at least one of said one or more interface units is a parallel interface unit communicating with at least a motor, said motor activating under control of said central processing unit to advance said printable media past said printhead.

5 18. The controller of claim 12 wherein said image storage memory is greater than 1 Mbytes.

19. The controller of claim 12 wherein said image storage memory is approximately 1.3 Mbytes.

10 20. The controller of claim 12 wherein said program memory is no greater than 8 Kbytes.

21. The controller of claim 13 wherein said scratch memory is no greater than 2 Kbytes.

15 22. The controller of claim 12 wherein said printhead interface includes a print generator unit that transforms said image stored in said image storage memory to a dithered CMY image for printing by said printhead.

23. The controller of claim 22 wherein said dithered CMY image has a resolution of 1600dpi.

20 24. The controller of claim 12 wherein said printhead interface includes a synchronization generator unit that generates synchronization signals for transferring said image from said printhead interface to said printhead.

25. The controller of claim 24 wherein said synchronization generator unit generates signals for synchronization of a motor of said printer module.

26. The controller of claim 12 wherein at least one of said one or more interface units communicates with a QA chip of an ink cartridge.

25 27. The controller of claim 26 wherein two of said one or more interface units communicate with a pair of QA chips, one said QA chip being said QA chip of said ink cartridge and the other said QA chip being an associated QA chip, said QA chips cooperating to authenticate said ink cartridge for said printer module.

30 28. The controller of claim 12 wherein said controller is an application specific integrated circuit.

ABSTRACT

A controller for a printer module having a printhead that prints an image on printable media including a low speed central processing unit with associated program memory storing program steps for execution by the central processing unit to operate
5 the printer module and associated scratch memory to store program variables. An image to be printed is stored in an image storage memory of approximately 1.3Mbytes. An image access unit accesses the image and transfers the image to a printhead interface on command from the central processing unit. The printhead interface transforms the image to a 1600dpi dithered CMY image for printing by a
10 monolithic printhead.

The controller also includes one or more interface units communicating with components of said printer module under control of the central processing unit. A Serial Bus interface communicates with the Serial Bus of a compact printer system to transfer data and power between modules. In one application, a camera module
15 captures an image which is transferred to the image storage memory of the printer module for printing by the printhead.

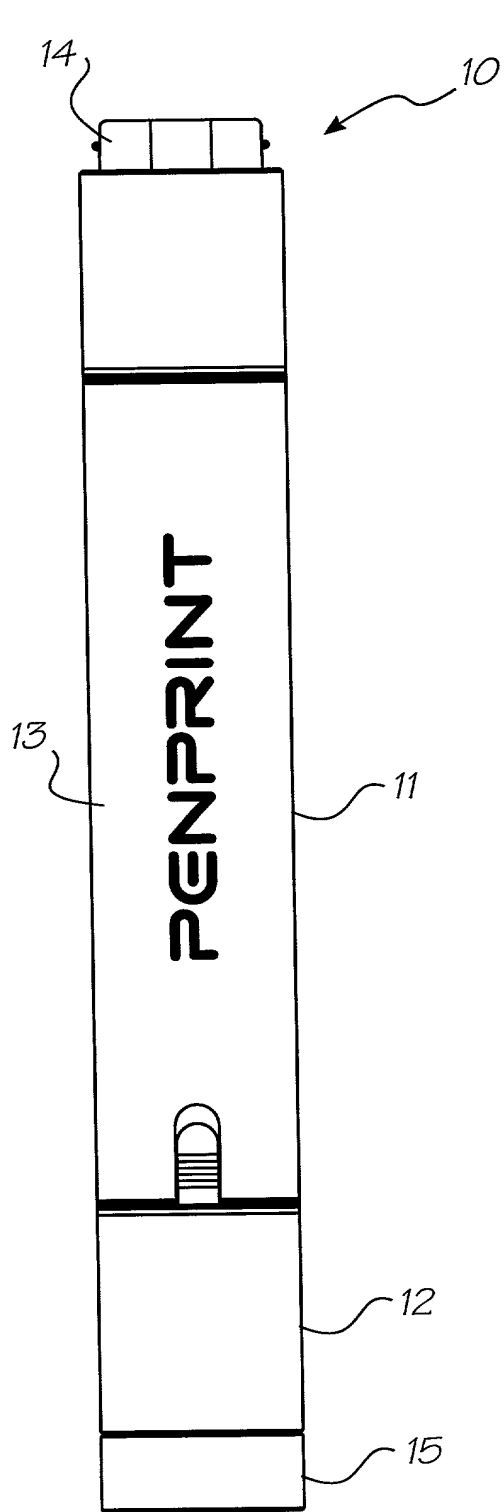


FIG. 1

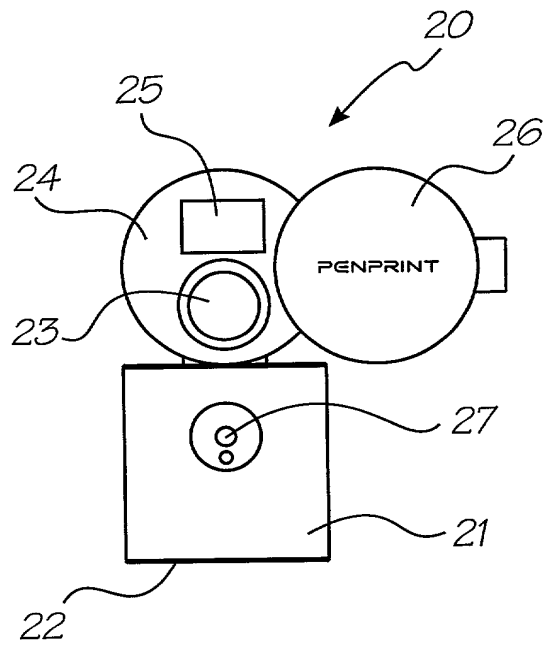


FIG. 2

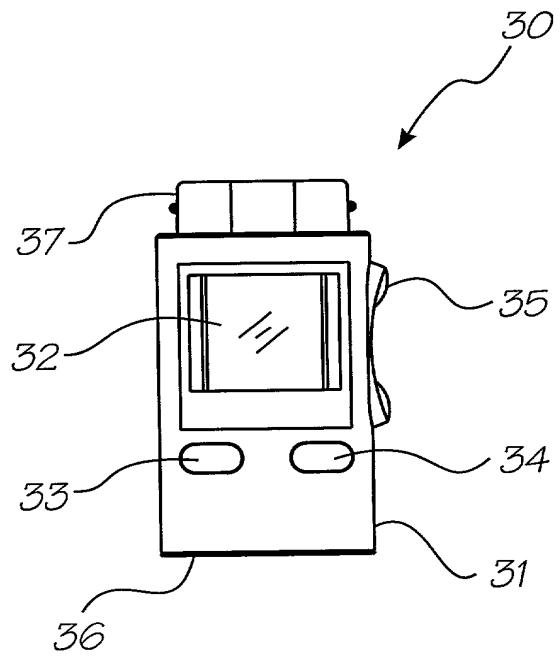


FIG. 3

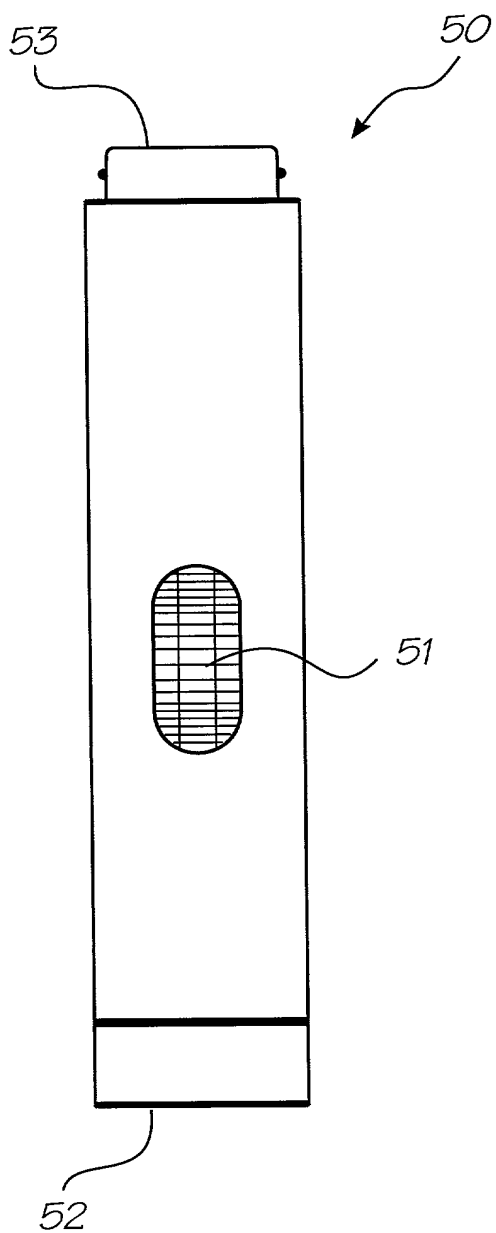


FIG. 5

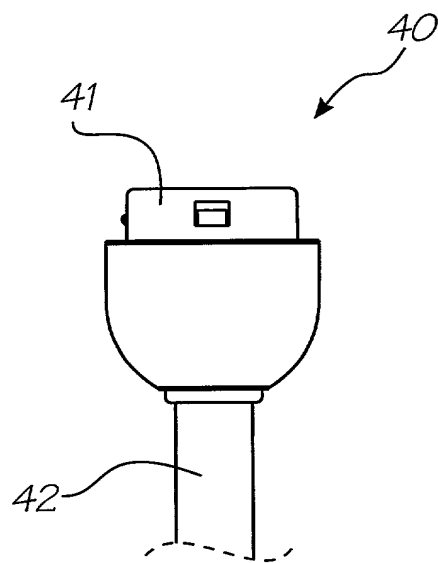


FIG. 4

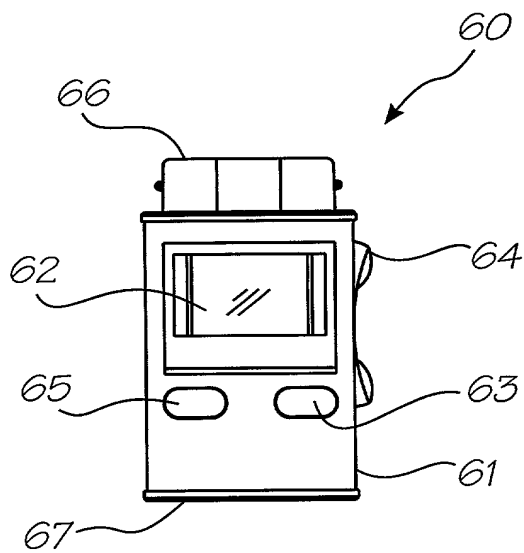
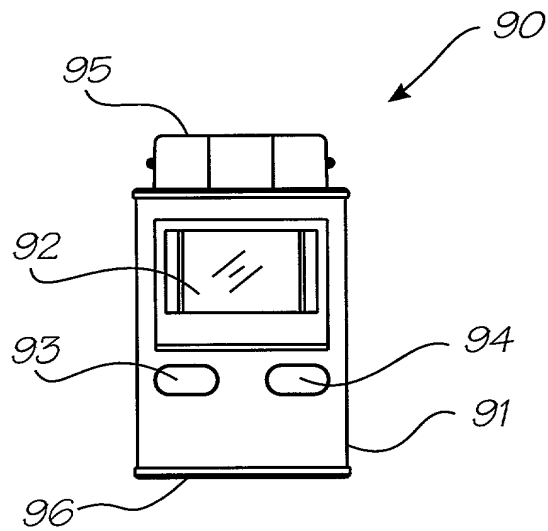
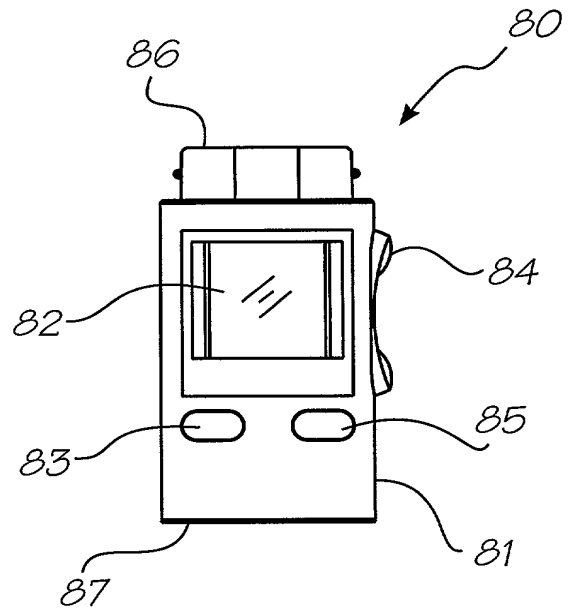
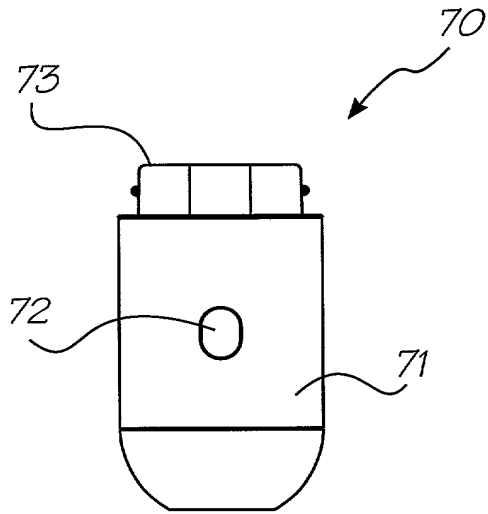


FIG. 6



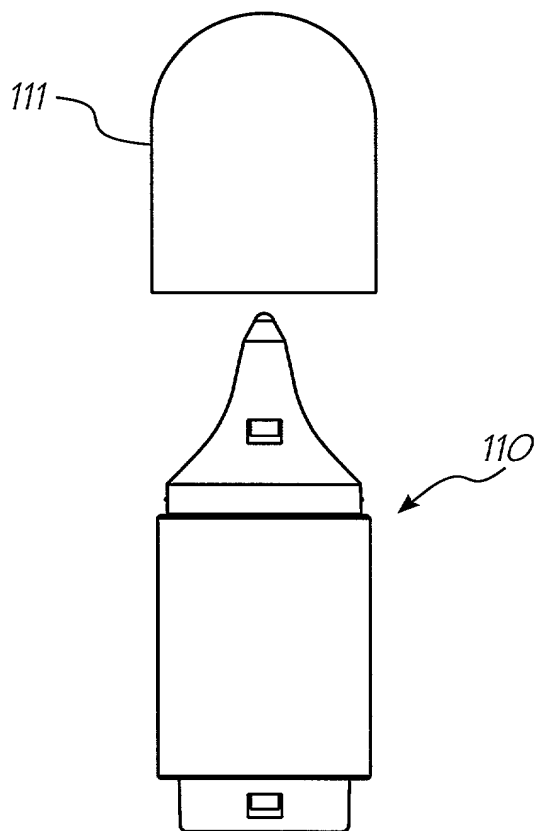


FIG. 11

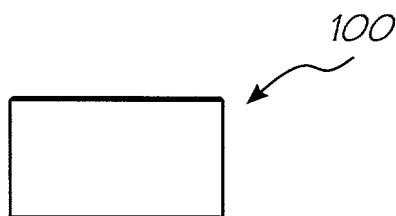


FIG. 10




FIG. 12

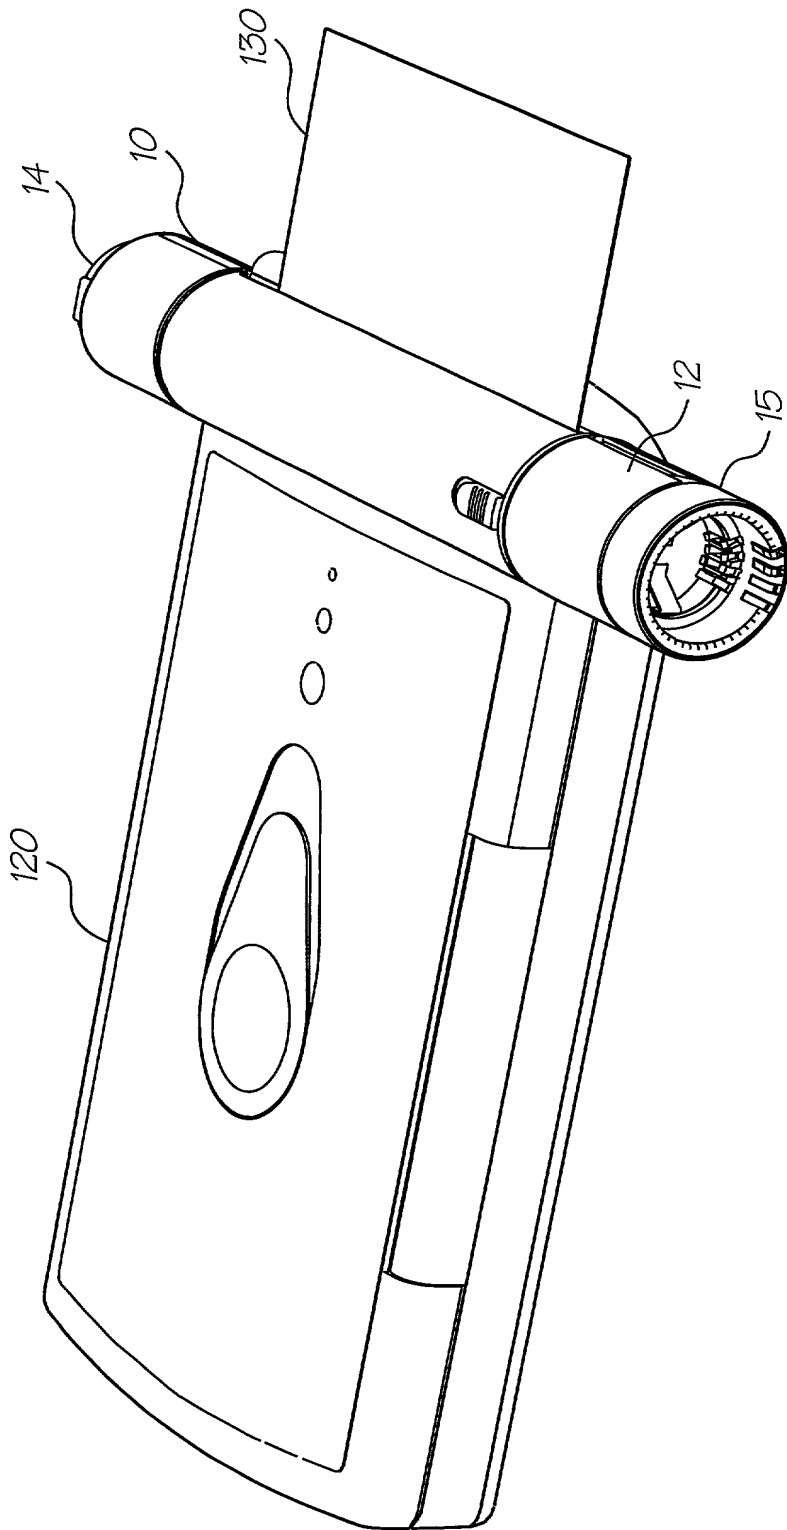


FIG. 13

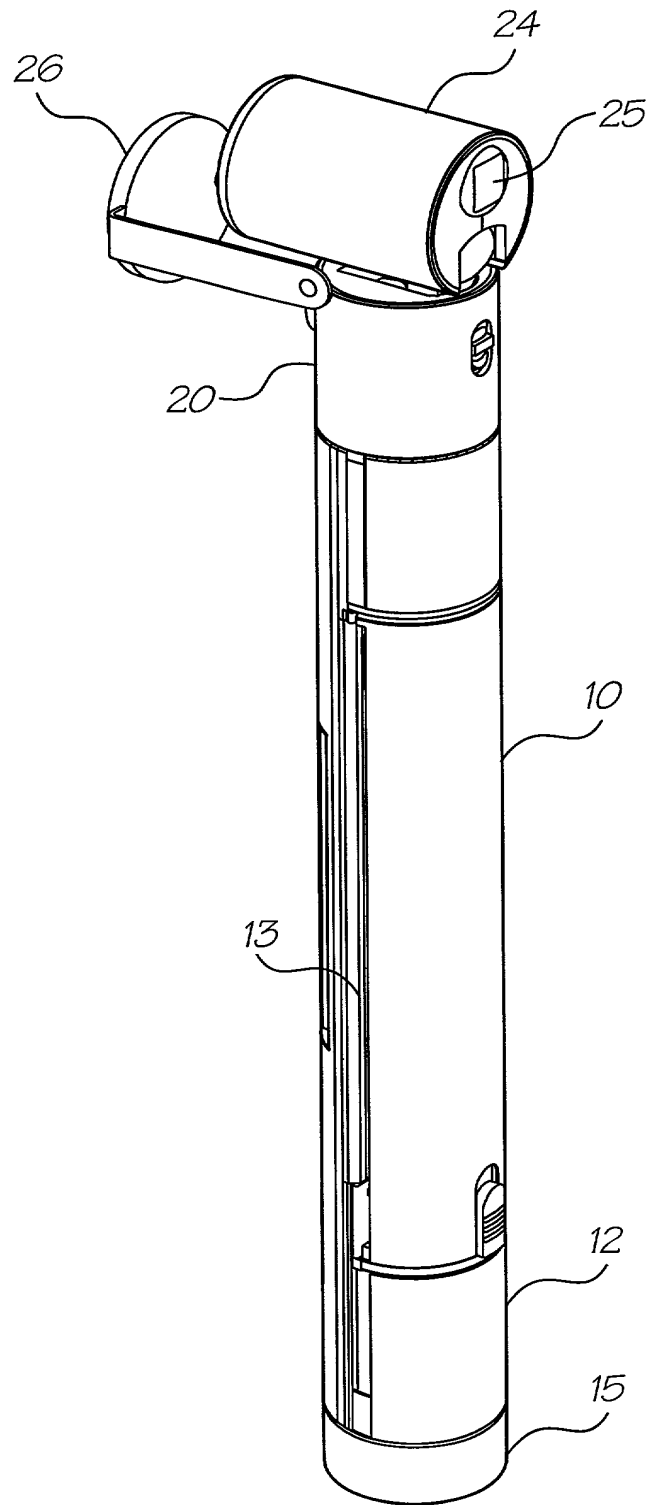


FIG. 14

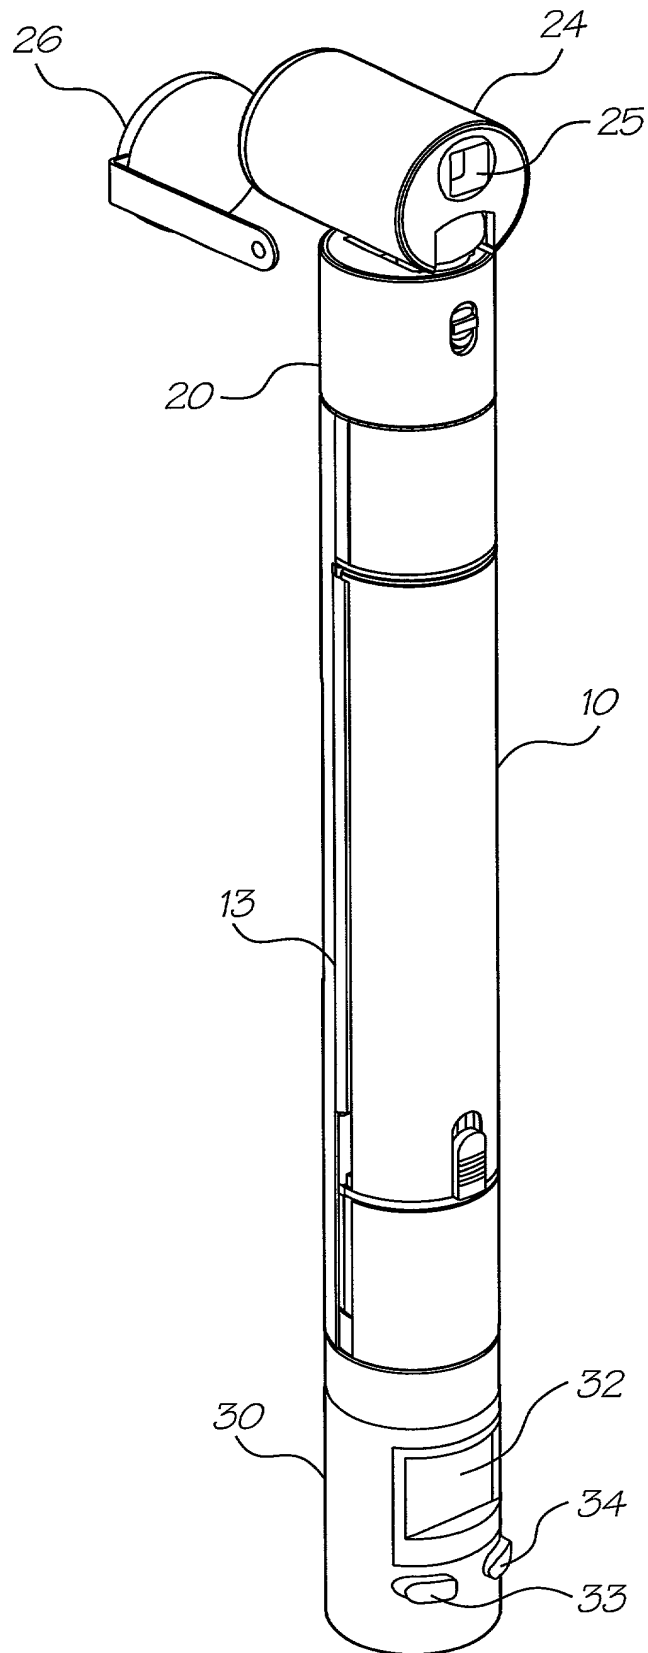


FIG. 15

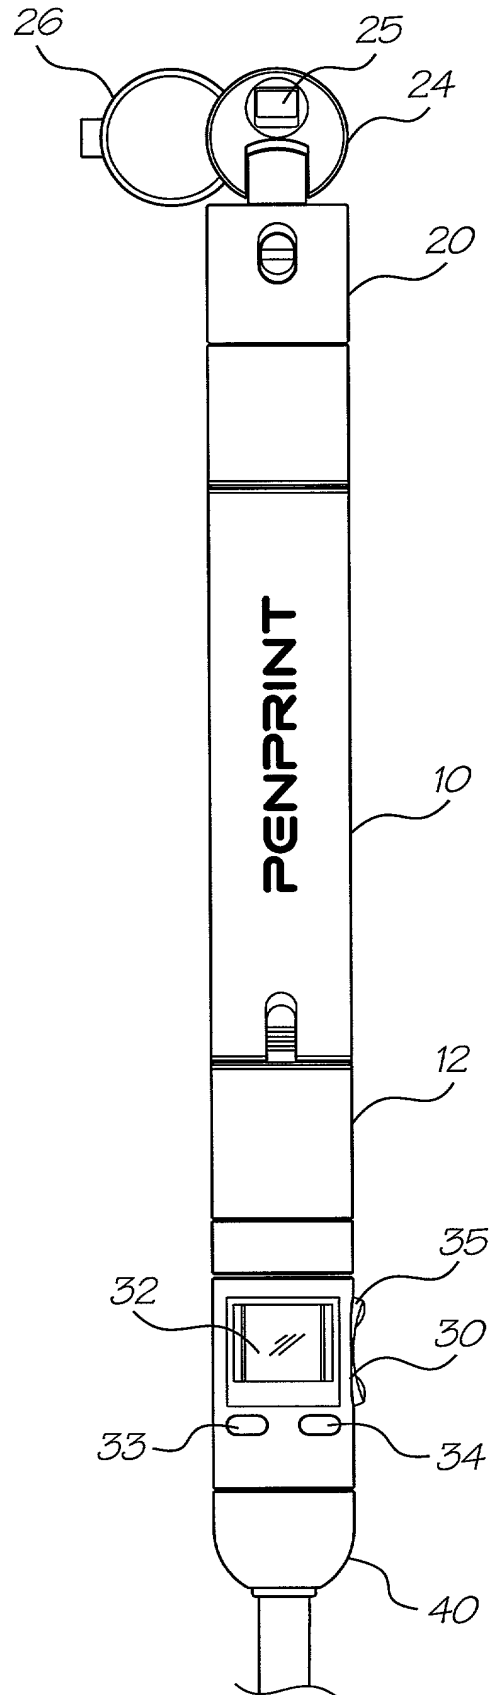


FIG. 16

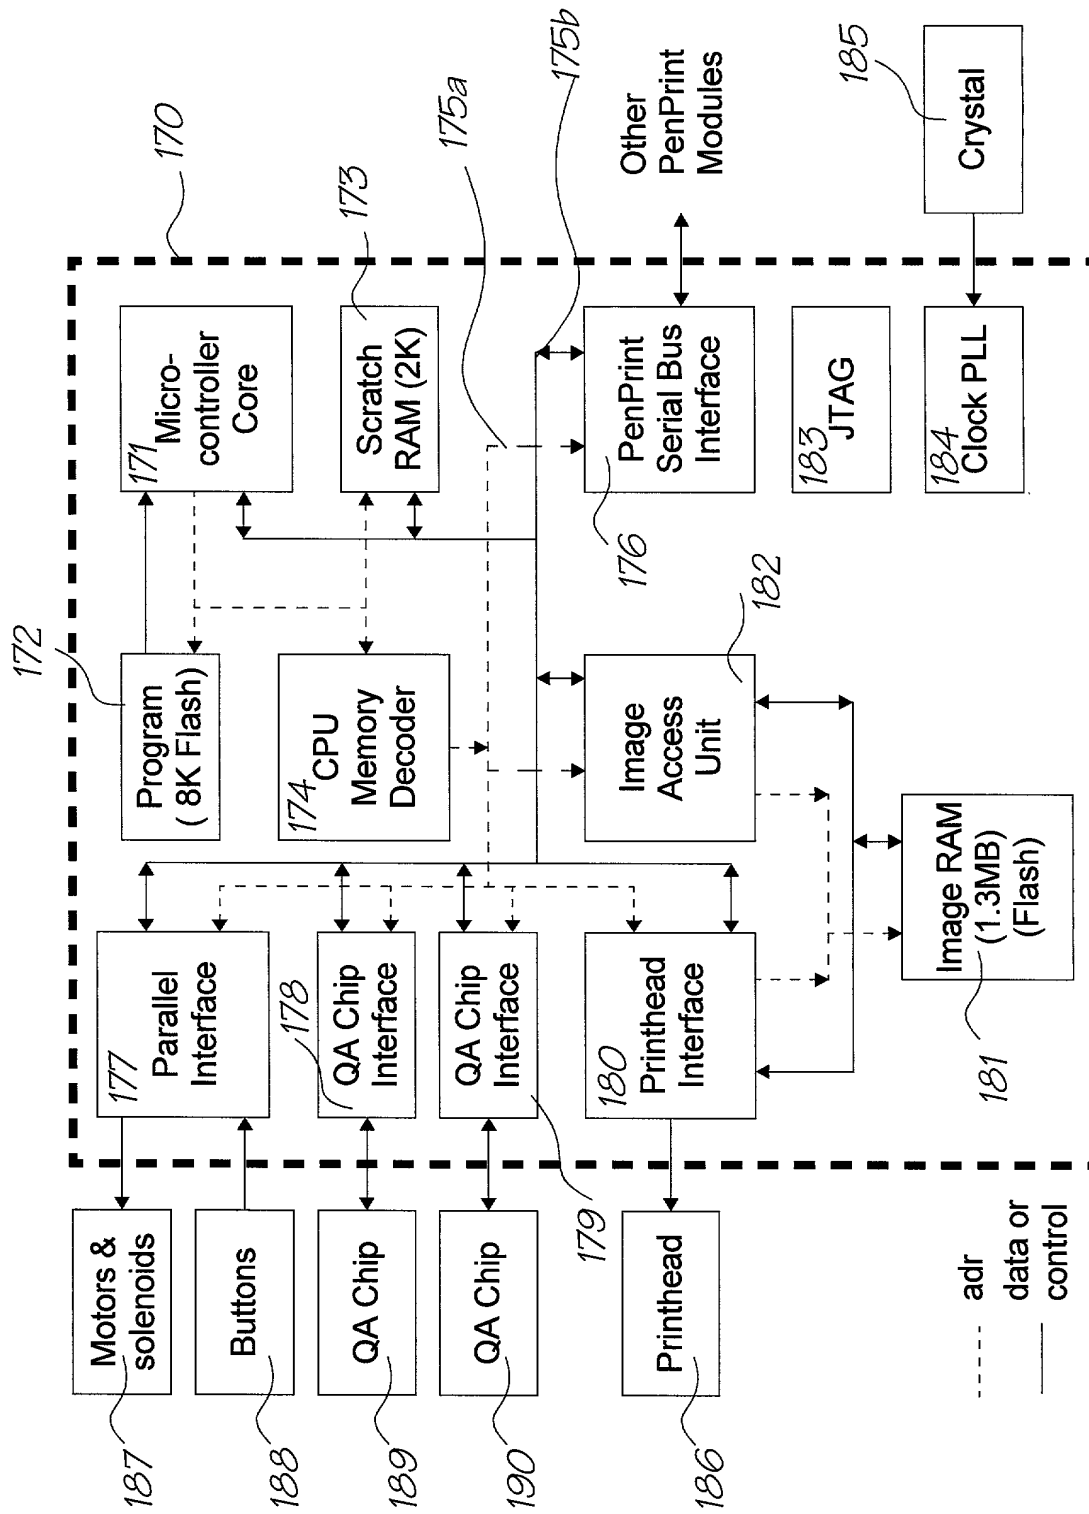


FIG. 17

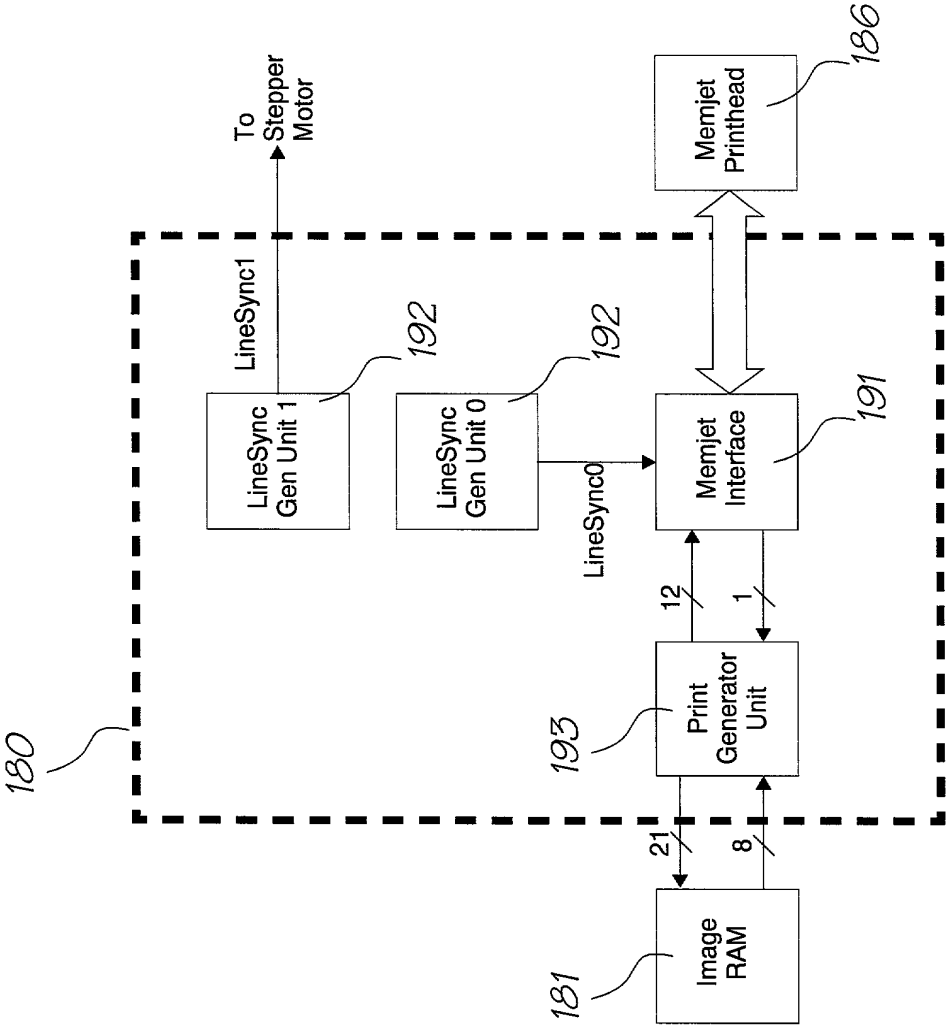


FIG. 18

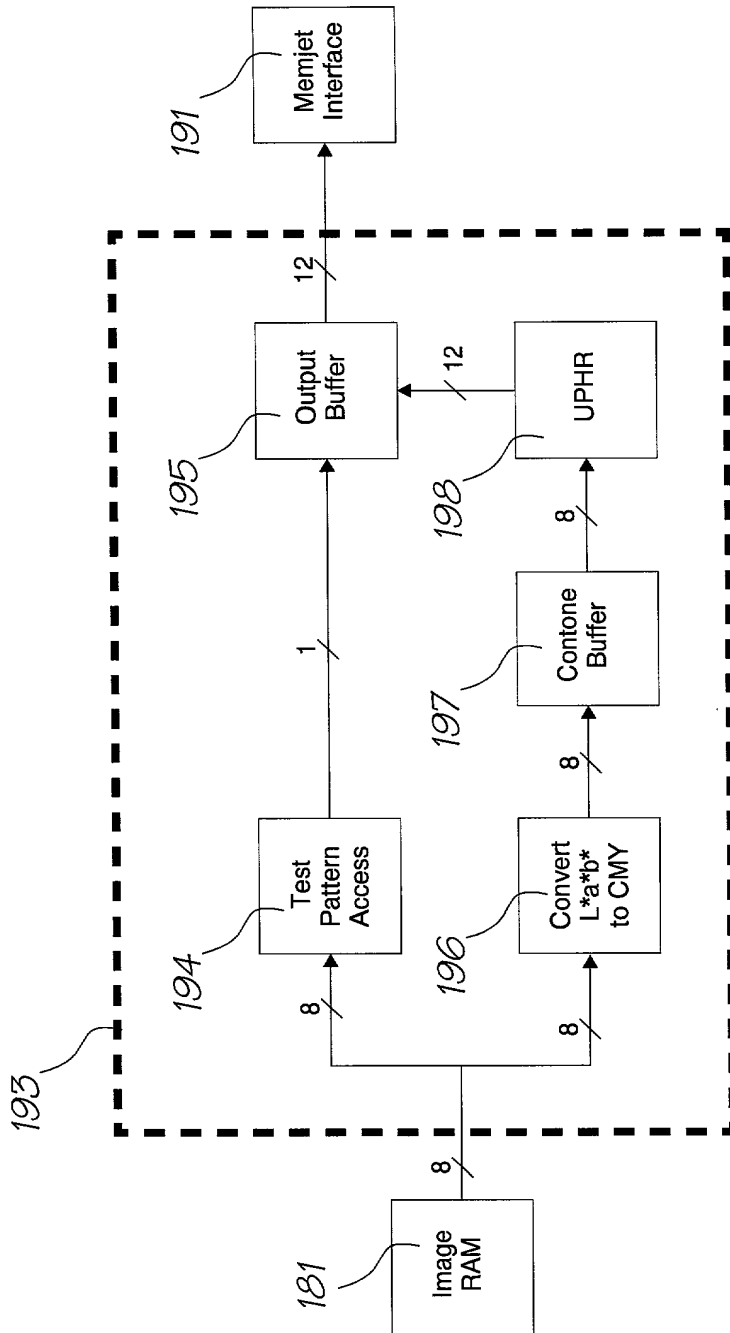


FIG. 19

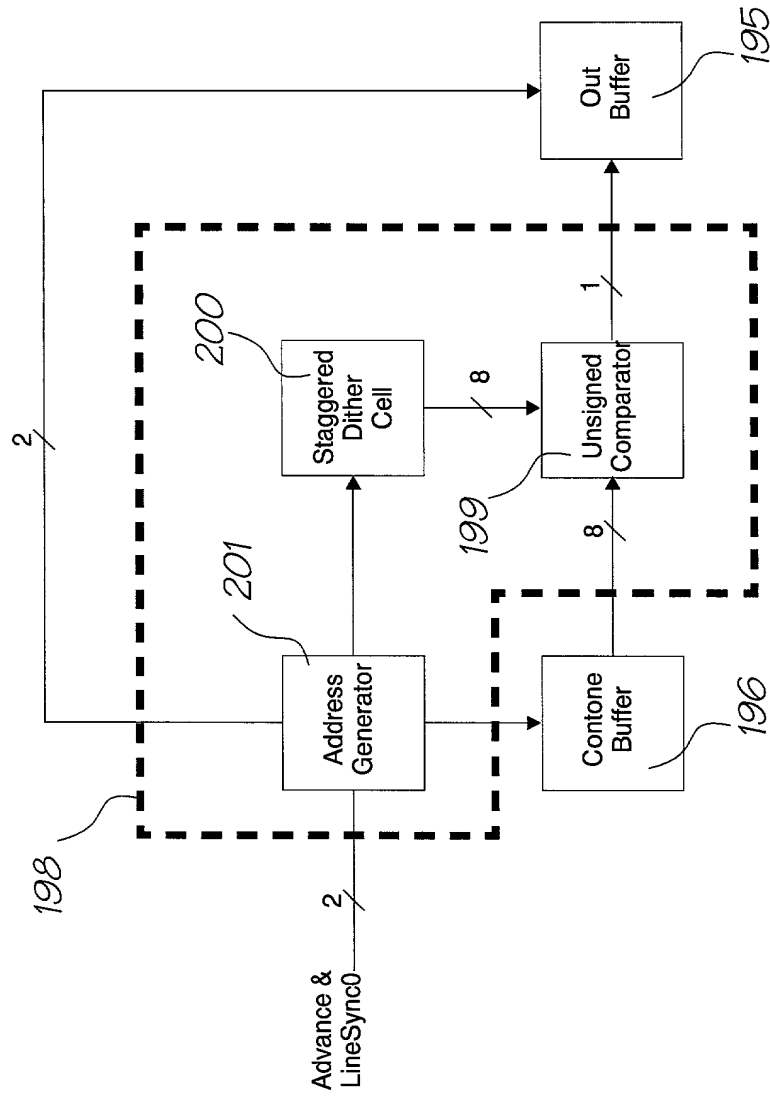


FIG. 20

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63) <input checked="" type="checkbox"/> Declaration Submitted with Initial Filing OR <input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)	Attorney Docket Number	PP07US
	First Named Inventor	Simon Robert Walmsley
	COMPLETE IF KNOWN	
	Application Number	/
	Filing Date	
	Group Art Unit	
	Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

CONTROLLER FOR PRINTER MODULE

the specification of which (Title of the Invention)

☒ is attached hereto
OR

☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International

Application Number and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
PQ0560	Australia	05/25/1999	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → +PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☐ Customer Number OR
☐ Registered practitioner(s) name/registration number listed below

Place Customer
Number Bar Code
Label here

Name	Registration Number	Name	Registration Number

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☒ Customer Number or Bar Code Label 24011 OR ☐ Correspondence address below

Name	Kia Silverbrook				
Address	Silverbrook Research Pty Ltd				
Address	393 Darling Street				
City	Balmain	State	NSW	ZIP	2041
Country	Australia	Telephone	61-2-9818-6633		Fax 61-2-9818-6711

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle (if any))		Family Name or Surname	
Simon Robert		Walmsley	
Inventor's Signature	<i>Simon Walmsley</i>		Date
Residence: City	Epping	State	NSW
		Country	Australia
Post Office Address	Unit 3, 9 Pembroke Street		
Post Office Address			
City	Epping	State	NSW
		ZIP	2121
		Country	Australia

☒ Additional inventors are being named on the _____ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

Please type a plus sign (+) inside this box → ☐

PTO/SB/02A (3-97)
 Approved for use through 9/30/98 OMB 0651-0032
 Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION
ADDITIONAL INVENTOR(S)
Supplemental Sheet
 Page 1 of 1

Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Paul				Lapstun			
Inventor's Signature	<i>Paul M-</i>					Date	May 16, 2000
Residence: City	Rodd Point	State	NSW	Country	Australia	Citizenship	Norwegian
Post Office Address 13 Duke Avenue							
Post Office Address							
City	Rodd Point	State	NSW	ZIP	2046	Country	Australia
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Inventor's Signature						Date	
Residence: City		State		Country		Citizenship	
Post Office Address							
Post Office Address							
City		State		ZIP		Country	
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Inventor's Signature						Date	
Residence: City		State		Country		Citizenship	
Post Office Address							
Post Office Address							
City		State		ZIP		Country	

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.